

Product Information


DJ5A 2-Wire Indoor Monitor



DESCRIPTION

2-wire system indoor monitor, audio phone.


DIMENSION

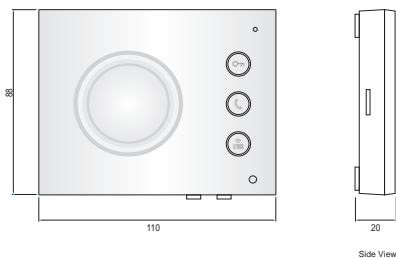

FEATURES

- ▶ DIP address setting;
 - ▶ Max.128 DIP addresses;
 - ▶ Inner call Intercom;
 - ▶ Two locks control;
 - ▶ 4 ringtones choice;
 - ▶ Suitable for villa&apartment system.
-


1. Parts and Functions

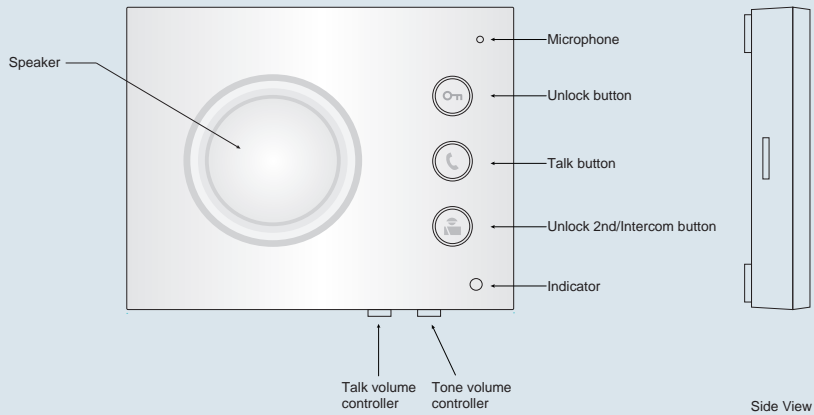

Key functions

Speaker	Send out voice from the visitor.
Microphone	Receive voice from the user.
Unlock button	Press to release the door.
Talk button	Press to communicate hands free with visitor
Unlock 2nd button/ Intercom button	During calling/talking state, press Unlock 2nd button to release the second door; In standby mode, press Call button to activate the intercom call.
Indicator	Power and working indicator.
Tone volume contronller	Adjust the tone volume.
Talk volume contronller	Adjust the talk volume.

Terminal Descriptions

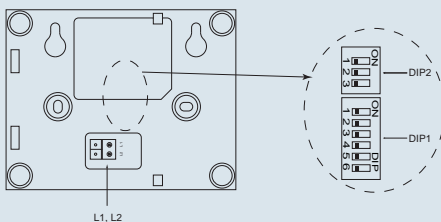

L1,L2:Bus terminal.




DIP1(Bit1~6):Used to User Code setting.

DIP2(Bit1~3):Used to Slave Monitor Address

or Extended Address setting.

2. Mounting

- 1). Fix 2 screws to the wall at a appropriate height;
- 2). Connect the system correctly;
- 3). Attach the audio phone to the bracket.

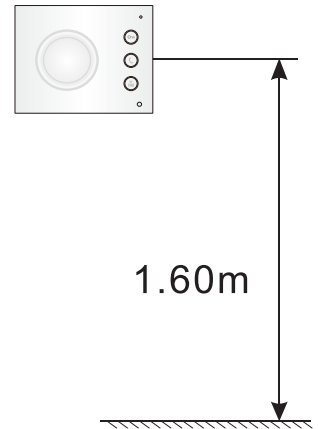

3. Specification

- Power Supply : DC 24V;
- Power Consumption: Standby 16mA; Working status 56mA;
- Working Temperature: -15°C ~ +55°C;
- Wiring: 2 wires, non-polarity;
- Dimension: 88(H)×110(W)×20(D)mm;

4. Packing Information



Dimensions: 128(H)×92(W)×30(D)mm

Gross Weight: 0.3Kg



Carton: 415 (H)×360 (W)×265 (D)mm

Quantity: 88PCS