

# Product Information

---

---

## DT607 Series 2-Wire Outdoor Station

---




---

### DESCRIPTION

2-wire system color outdoor station with fisheye camera.

### DIMENSION

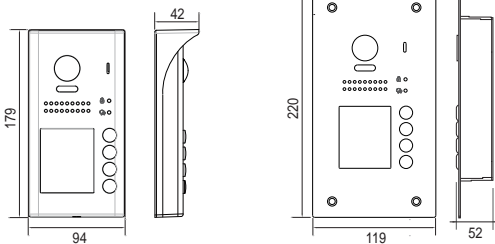



Unit: mm

### FEATURES

- 170° wide visual angle;
  - Auto-sensor light illumination;
  - Zinc alloy (S) / stainless steel (F);
  - Unlock & talk indication;
  - Multi buttons for 1-4 users;
  - Support surface and flush mounting;
  - Proximity access control;
  - Two types of lock control;
  - External PIR module interface;
  - Large nameplate display;
  - IP54 waterproof rate.
-




## 1. Parts and Functions

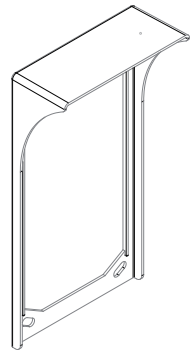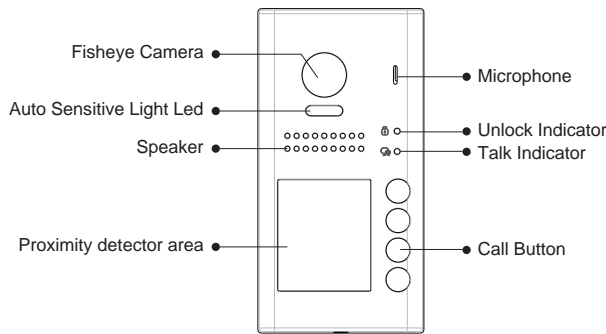

Rainy Cover

## 2. Terminal Description

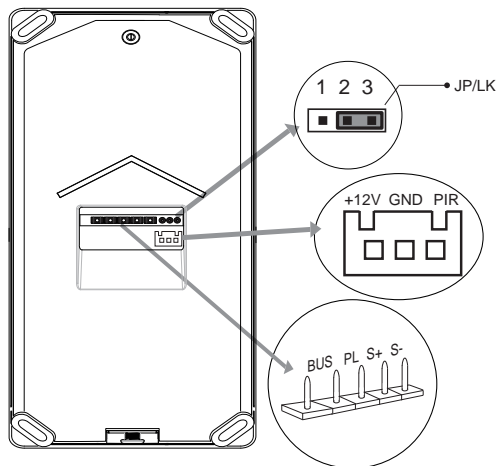

**JP/LK:** Lock control jumper, to select the lock type.

**+12V:** 12VDC power output.

**GND:** Power ground.

**PIR:** Connect to PIR module.

**BUS:** Connect to the bus line, no polarity.

**PL:** External lock power input, connect to the power positive(power +).







**S+:** Lock power(+) output.

**S-:** Lock power(-) output, connect to the power(-) input of locks(only when using the camera to power the locks, if using the external power supply for the locks, the S- will not be connected).









### 3. Mounting

#### DT607 Mounting With Rainy Cover

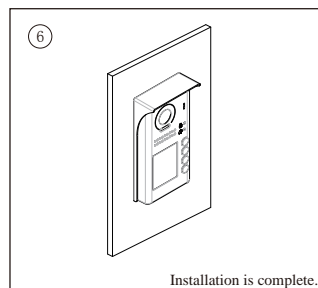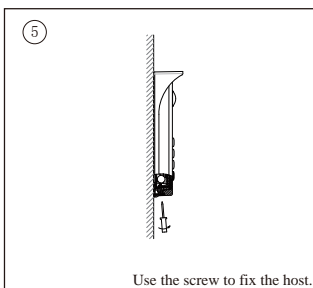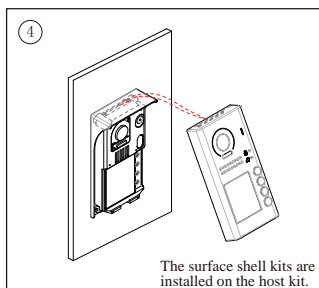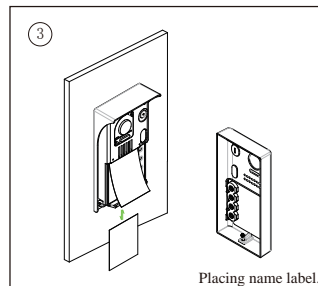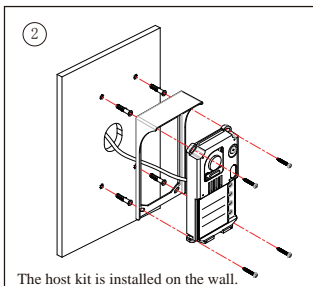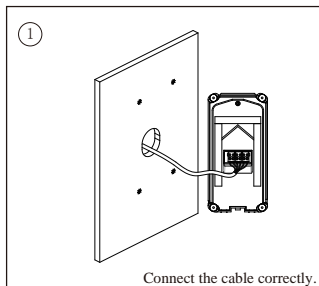

#### DT607F Mounting With Rainy Cover

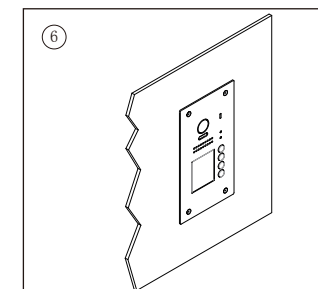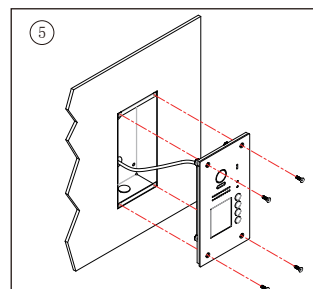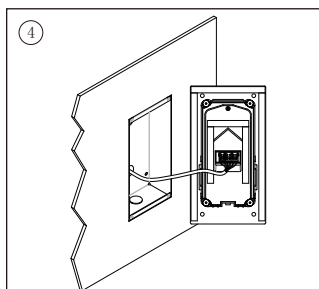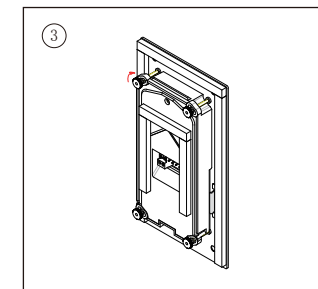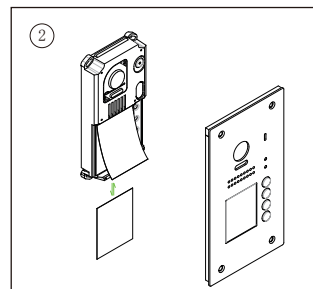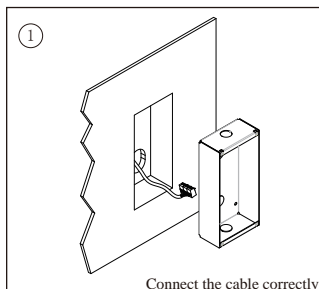



## 4. Specification

- Power Supply : DC 24V;
- Power Consumption: Standby 25mA; Working status 160mA;
- Camera: 1/2.7" 170°fisheye lens, (H) & 90(V)view angle, CMOS with 500TVL resolution;
- Lock Power supply: 12Vdc, 300mA(Internal Power);
- Unlock time: 1~99s(Default 1s);
- Working temperature: -20°C ~ +55°C;
- Wiring: 2 wires,non-polarity;
- Dimension: 179(H)×94(W)×42(D)mm(DT607);  
220(H)×119(W)×52(D)mm(DT607F).

## 5. Ordering Information



DT607F/FE/ID/S4



DT607/FE/ID/S1/RH



DT607/FE/ID/S2/RH



DT607/FE/ID/S3/RH



DT607/FE/ID/S4/RH



DT607A/ID/S4/RH

Model No.	Description	Remark
DT607F/FE/ID/S4	Fisheye camera outdoor station by flush mounting with proximity access control (4 buttons,single row)	NSTC, PAL must be specified
DT607/FE/ID/S1/RH	Fisheye camera outdoor station with proximity access control (1 button)	NSTC, PAL must be specified
DT607/FE/ID/S2/RH	Fisheye camera outdoor station with proximity access control (2 buttons,single row)	NSTC, PAL must be specified
DT607/FE/ID/S3/RH	Fisheye camera outdoor station with proximity access control (3 buttons,single row)	NSTC, PAL must be specified
DT607/FE/ID/S4/RH	Fisheye camera outdoor station with proximity access control (4 buttons,single row)	NSTC, PAL must be specified
DT607A/ID/S4/RH	Audio outdoor station with proximity access control (4 buttons,single row)	NSTC, PAL must be specified



**6. Packing Information**

**Single Package**



Dimensions: 202(H)×100(W)×60(D)mm

Dimensions: 225(H)×140(W)×63(D)mm

Gross Weight: 0.76Kg

Gross Weight: 0.97Kg

**Carton Package**



Carton: 415 (H)×360 (W)×265 (D)mm

Carton: 415 (H)×360 (W)×265 (D)mm

Quantity: 28PCS

Quantity: 15PCS