
DT Accessories PC6A




DESCRIPTION

2-wire system 24V Power Comb with Din-rail mounting.

DIMENSION






FEATURES

- Power comb unit for DT system;
- Universal AC input/full range;
- Short circuit, overload and over voltage protections;
- Din-rail mounting; DC26V 1.5A output.

DT Accessories PC6A

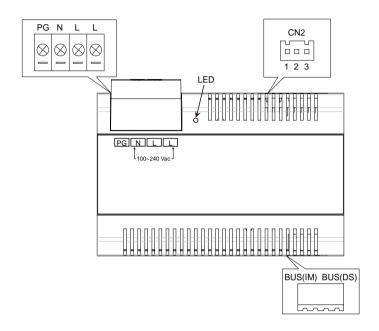

PARTS AND FUNCTIONS

PG: Earth ground port.

N: AC input.

L: AC input.

LED: power indicator, always on when plug in

power.

CN: bus control terminal.

BUS(IM): indoor monitor connection terminal.

BUS(DS): door station connection terminal.

SPECIFICATION

Input Voltage: 100~240Vac

Input Frequency: 50~60Hz

Rated Output Voltage: DC 26V±2V

Rated Output Current: 1.5A

Working Temperature: -20°C~55°C

SW Port Input Voltage: Max.230Vac, 2A

Dimension: 140*90*60mm