


Product Information

DT Accessories
DT-SCU

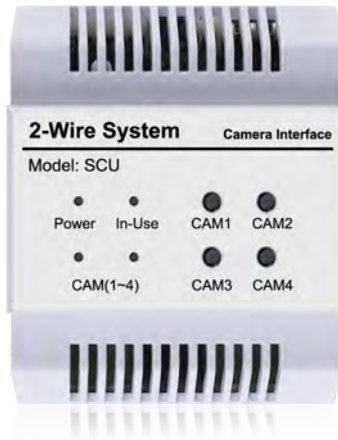


DESCRIPTION

2-wire system CCTV camera control unit.


FEATURES

- ▶ Camera controller for DT system;
- ▶ Support normal CCTV and DT-CAM;

DIMENSION

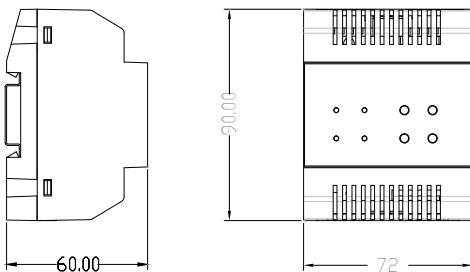

1.Parts and Functions

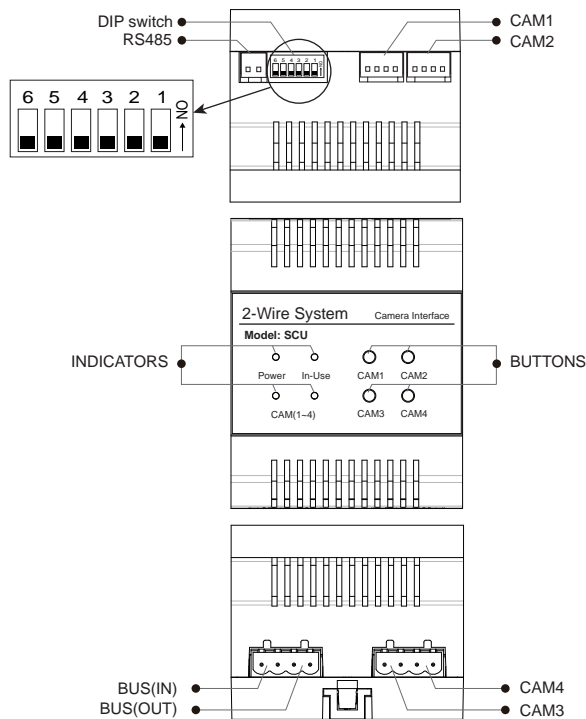

RS485:Reserved.

CAM1~2:Connect to regular analog CCTV(the following called TYPE A Camera).

CAM3~4:Connect to 2 wire camera(the following called TYPE B Camera).

BUS(IN):Connect to the bus line, no polarity.

BUS(OUT):Connect to the bus line, no polarity.

BUTTONS:Press CAM1~CAM4 button, it can control the corresponding video output.


INDICATORS:

1.**Power:** Working indicator, always on when the SCU work normally.

2.**In-Use:**Video output indicator, always on when the SCU output the video.

3.**CAM(1~4):**Video output indicator.

2. Unit Mounting

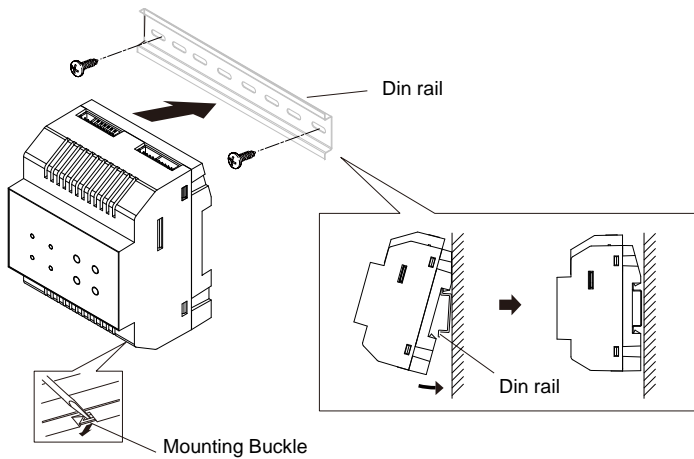

Step1: Mount the din rail to the wall with screws ;

Step2: Pull down the mounting buckle, then hang the unit on din rail.

3. Specification

- Power Supply : DC 26V
- Power Consumption: Standby 0.4W; Working status 0.8W~1W
- Working temperature: -15°C ~ +55°C
- Wiring: 2 wire, non-polarity
- Dimension: 90(H)X72(W)X60(D)mm

4. Packing Information



Dimensions: 73(H)×73(W)×108(D)mm
Gross Weight: 0.23Kg



Carton: 530 (H)×340 (W)×258 (D)mm
Quantity: 56PCS